

# 22-2 Shielded Audio Cable Plenum Rated

Part No.: B1P22TOSEZP

## Applications:

This document establishes the specifications for a two conductor (1 pair) shielded cable used for low noise analog audio, in-wall microphone, communication, or low voltage control cable where mid - capacitance and small diameter are specified. For use in plenum spaces.


## Construction Details:

Number of Conductors: 2/C  
 Conductor: 22AWG 7/30 Stranded Tin Copper  
 Insulation Material: FEP  
 Nominal Insulation Thickness: 0.0075 in.  
 Color Code: Black, Red  
 Drain Wire\*: 24AWG Stranded Tin Copper  
 Shield\*: Aluminum/Polyester (100% Coverage)  
 Jacket Material: Low Smoke Plenum PVC  
 Nominal Jacket Diameter: 0.128 in.  
 Jacket Color: Natural White, or per order  
 Print:  
 3122598 CMP C(ETL)US 22AWG SINGLE PAIR  
 AUDIO CABLE FT6 ROHS COMPLIANT MADE IN  
 USA + Sequential Footage Marking

Note: Drain wire is inside the foil. Foil is facing in. Foil strips off when the jacket is removed, as with automated stripping equipment.

## Codes & Listings:

- C(ETL)US

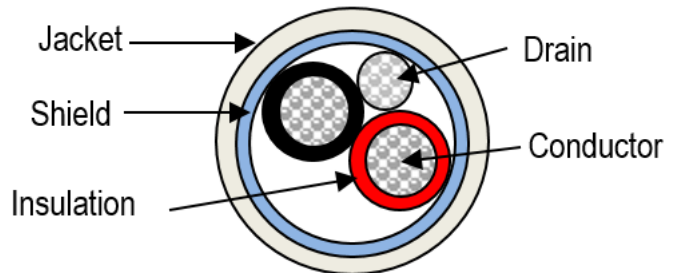

## Electricals:

Suggested Working Voltage:	300 Volts
Nom Capacitance Cond-Cond:	35 pF/ft
Nom Cap. Cond. To Cond.+Shld:	67 pF/ft
Velocity of Propagation:	69%

## Technical Details:

Temperature Rating		
	Operation	0°C to +75°C
	Installation	0°C to +60°C
	UL 444	+60C
Nominal Weight:	10.3 lbs. / 1,000 ft.	

## Standards:

- NEC Article 800
- UL Subject 444, Type CMP FT6
- NFPA 262



MADE IN THE USA




Issue Date: 07/20  
 Revision: 6

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

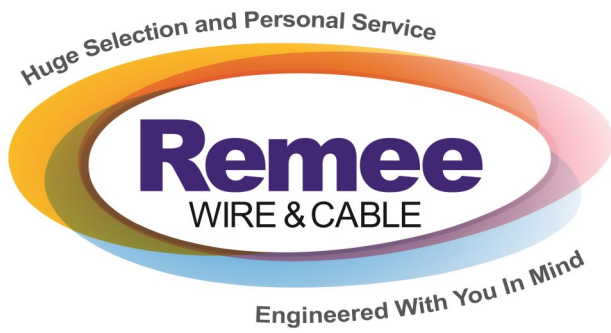

# 22-2 Shielded Audio Cable Plenum Rated

Part No.: B1P22TOSEZP

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeo Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document; Remeo Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeo Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



MADE IN THE USA



Issue Date: 07/20  
Revision: 6

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)