

14-4 Unshielded Local Law #39 Fire Alarm

ETL listed for guaranteed performance
Made in New York

Part No.: NY144CUH

Applications:


This document establishes the specifications for a four conductor twisted unshielded cable used for Local Law #39 fire alarm installations.

Construction Details:

Number of Conductors: 4/C
 Conductor: 14AWG Solid Bare Copper.
 Insulation Material: ECTFE.
 Nominal Insulation Thickness: 0.016"
 Nominal Insulation Diameter: 0.096"
 Color Code: Black, Red, Green, White
 Shield: N/A
 Drain: N/A
 Jacket Material: ECTFE.
 Jacket Color: Red
 Nominal Jacket Thickness: 0.026"
 Nominal Diameter: 0.283"
 Surface Print:
 VIGILANCE™ by REMEE TYPE FPLP 14AWG
 150°C (ETL)US ALSO CLASSIFIED NYC CERT.
 FIRE ALARM CABLE LL39 MADE IN USA +
 Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.
 Direct Current Resistance: 2.57 ohms/1000' @25°C
 Nominal Capacitance: 23.7 pF/ft.
 Insulation Resistance: >100 Megohms/1M' @ 60°C
 Nominal Impedance: 74 Ohms

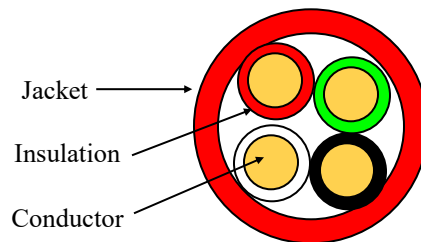

Technical Details:

Temperature Rating	Operation	-20°C to 150°C
Nominal Weight:	77 lbs. / 1,000 ft.	

Standards:

- National Electric Code—Article 760 Type FPLP
- Building Code City of New York
- Certified For Use In New York City, Local Law No. 39
- NFPA 262

Codes & Listings:

- UL Subject 1424
- (ETL)US FPLP

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



Issue Date: 12/21
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.


This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remee.com

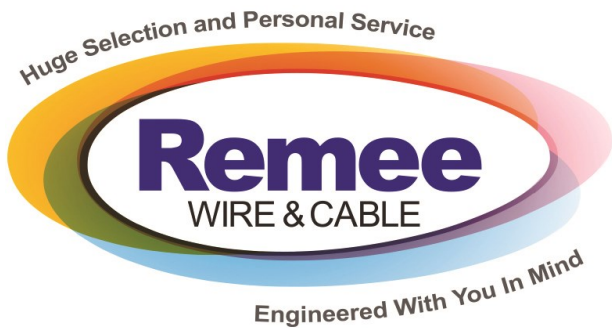

14-4 Unshielded Local Law #39 Fire Alarm

ETL listed for guaranteed performance
Made in New York

Part No.: NY144CUH

Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length Designations — **M** for 1000 feet, and **L** for 500 feet

Available Put-Up's — **1** for Reel, and **2** for Box

Available Jacket Color — **R** for Red

These 3-place designators are placed at the end of the specific part number for LL39 compliant parts to fully describe the individual packaging and length.

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order. The Remeë Wire & Cable warranty is an integral part of this specification. This item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 12/21
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remee.com