

OSP Access Control Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00907WBT

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed with a water block tape suitable for wet locations used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Gray
 Rip Cord: Nylon
 Nominal Diameter: 0.179 in.
 Surface Print: 3122598 LOCK POWER A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Conductors: 6/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red, White, Green, Orange, Brown
 Overall Shield: Aluminum/Polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Orange
 Rip Cord: Nylon
 Nominal Diameter: 0.200 in.
 Surface Print: 3122598 CARD READER A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red
 Jacket Material: Polyvinyl Chloride
 Jacket Color: White
 Rip Cord: Nylon
 Nominal Diameter: 0.122 in.
 Surface Print: 3122598 DOOR CONTACTA B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 4/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red, Green, White
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Blue
 Rip Cord: Nylon
 Nominal Diameter: 0.140 in.
 Surface Print: 3122598 REX/SPARE A B C D E 0 1 2 3 4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and wrapped with a water block tape and overall jacketed
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Thickness: 0.025 in.
 Nominal Diameter: 0.445 in.
 Surface Print: VIGILANCE™ by REMEE OSP
 ACCESS CONTROL CABLE DOOR/ZONE A B C D E 0 1 2 3 4 5 6 7 8 9 C(ETL)US CMR 75C ROHS MADE IN USA + Sequential Footage Marking

Technical Details:

Temperature Rating	Operation: -20°C to 75°C
Nominal Weight:	100 lbs. / 1,000 feet

Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMR
- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Issue Date: 05/20
Revision: 1


All warranty information can be viewed at WWW.REMEE.COM

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160




Website: www.remee.com

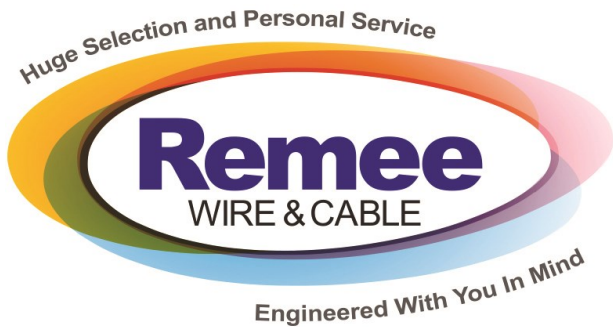

OSP Access Control Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00907WBT

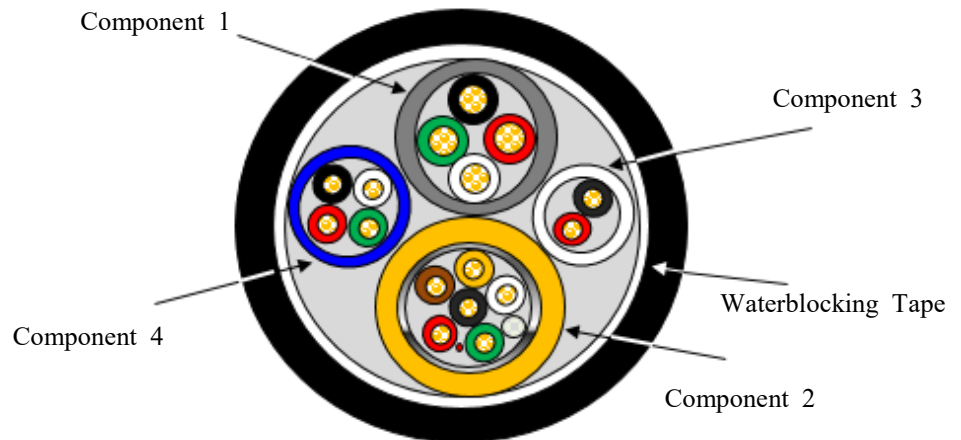

Electricals:

Voltage Rating: 300 volts
 CAPACITANCE: ELEM 1: 27 PF/FT. NOM.; ELEM 2: 51 PF/FT. NOM.; ELEM 3 & 4: 20 PF/FT. NOM.
 IMPEDANCE: ELEM 1: 70 OHMS/MFT.; ELEM 2: 37 OHMS/MFT.; ELEM 3 & 4: 94 OHMS/1M'
 DC RESISTANCE: ELEM 1: 6.66 OHMS/1M'; ELEM 2 3 4: 16.9 OHMS/1M'

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
 Company: _____
 Date: _____



Issue Date: 05/20
Revision: 1

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com