

# Paired Unshielded, Plenum Rated

ETL Listed for Guaranteed Performance  
Made in the USA

## DIGIELEC - CMP

### Applications:


This document establishes the specifications for paired unshielded cable used for low voltage communication applications for use in plenum spaces.

### Construction Details:

Number of Conductors: See Table on Page 2  
 Conductor: Stranded Bare Copper  
 Insulation Material: Remguard LS-PVC  
 Nominal Insulation Thickness: See Table on Page 2  
 Color Code: Pair #1 - Black paired with Red  
 Pair #2 - Black paired with White  
 Pair #3 - Black paired with Green  
 Pair #4 - Black paired with Blue  
 Pair #5 - Black paired with Yellow  
 Pair #6 - Black paired with Brown  
 Pair #7 - Black paired with Orange  
 Pair #8 - Red paired with White

Tape: N/A  
 Jacket Material & Color: Remguard LS-PVC  
 Natural w/ a Green Stripe  
 Nominal Jacket Thickness: 0.015 in.  
 Nominal Diameter: See Table on Page 2  
 Surface Print: TEKWire™ by REMEE XXGA CMP  
 #XXP 75C C(ETL)US ROHS MADE IN USA  
 (DATE OF MFG) (LOT NUMBER) + Sequential  
 Footage Marking

Where XX and XX indicate size and number of conductors.

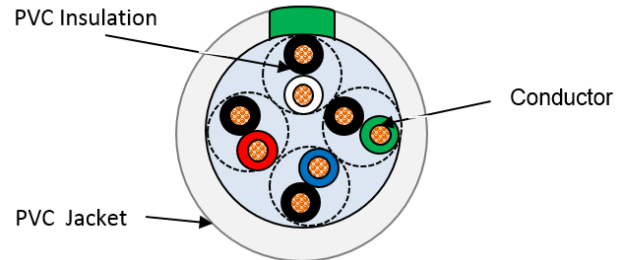

Representative Drawing

### Electricals:

Maximum Operating Voltage: 300 Volts, rms.  
 Nominal Mutual Capacitance: 35.0 pF/ft. @ 1 kHz  
 Upper Limit Capacitance: 40.0 pF/ft. @ 1 kHz  
 Nominal D.C.R.: 18AWG: 4.71Ω / 1,000 feet @ 20°C  
 16AWG: 3.74Ω / 1,000 feet @ 20°C  
 14AWG: 2.38Ω / 1,000 feet @ 20°C

### Technical Details:

#### Temperature Rating

Operation: 0°C to +75°C

Nominal Weight: See Table on Page 2

### Standards:

- National Electric Code - Article 800
- UL Subject 444, Type CMP

### Codes & Listings:

- c(ETL)us CMP




Issue Date: 1/21  
Revision: 3

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

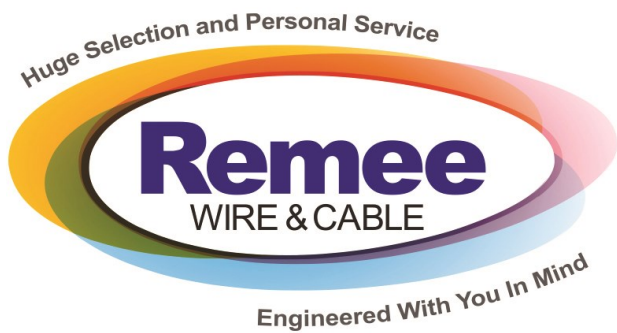

# Paired Unshielded, Plenum Rated

ETL Listed for Guaranteed Performance  
Made in the USA

## Part No.: DIGIELEC - CMP

Part Number	Construction	# of Cond.	Insul. Wall	Jkt. Wall	Dia (in)	Weight (lb/Mft)
2P18RRM1WE	2PR 18 AWG	4	0.012	0.015	0.241	34
4P18RRM1WE	4PR 18 AWG	8	0.012	0.015	0.322	61
6P18RRM1WE	6PR 18 AWG	12	0.012	0.015	0.380	85
8P18RRM1WE	8PR 18 AWG	16	0.012	0.015	0.446	117
2P16RRM1WE	2PR 16 AWG	4	0.016	0.015	0.282	52
3P16RRM1WE	3PR 16 AWG	6	0.016	0.015	0.317	66
4P16RRM1WE	4PR 16 AWG	8	0.016	0.015	0.375	97
6P16RRM1WE	6PR 16 AWG	12	0.016	0.015	0.454	134
8P16RRM1WE	8PR 16 AWG	16	0.016	0.015	0.530	184
2P14RRM1WE	2PR 14 AWG	4	0.016	0.015	0.337	73
3P14RRM1WE	3PR 14 AWG	6	0.016	0.015	0.383	90
4P14RRM1WE	4PR 14 AWG	8	0.016	0.015	0.446	122
6P14RRM1WE	6PR 14 AWG	12	0.016	0.015	0.529	172
8P14RRM1WE	8PR 14 AWG	16	0.016	0.015	0.611	231



MADE IN THE USA




Issue Date: 1/21  
Revision: 3

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

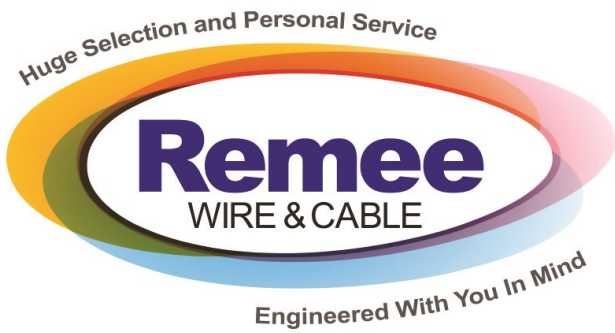

# Paired Unshielded, Plenum Rated

ETL Listed for Guaranteed Performance  
Made in the USA

Part No.: DIGIELEC - CMP

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



MADE IN THE USA



Issue Date: 1/21  
Revision: 3

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)