

Hybrid SMPTE-311M HDTV 4-Channel (Indoor) Plenum Rated

ETL Listed for guaranteed performance
Made in the USA

Spec Part No.: 4CSMPTP

Construction Details - Component 1

Conductor: 18AWG 19/30 TC
Insulation: FEP
Nominal Diameter: 0.078 in.
Colors: Blk, Wht, Blk/Yel, Wht/Yel, Blk/Om, Wht/Om, Blk/Blu, Wht/Blu

Construction Details - Component 2


Conductor: 24AWG 7/32 TC
Insulation: FEP
Nominal Diameter: 0.044 in.
Colors: Red, Gry, Red/Yel, Gry/Yel, Red/Om, Gry/Om, Red/Blu, Gry/Blu

Construction Details - Component 3

Fiber Type: Simplex Single-Mode
Buffer: Tight Buffer Blue
Material: Thermoplastic
Diameter: 900 ± 50 micron (.035 ± .002 in.)
Color/Diameter: Yellow numbered 1—8. Nominal Diameter 0.120in.

Overall Construction Details

Filler: Solid FEP
Cable Assembly: Two 18awg and two 24awg cabled with drain wire and shield. Four components and eight fiber cabled in 8.00in left hand lay.
Tape: Polyester Binder Tape
Jacket Material: Fluoropolymer
Jacket Thickness: 0.050 in., Nominal
Nominal Diameter: 0.670 in.
Jacket Color: UV Resistant Blue w/Yellow Stripe (Other Colors Available with MOQ)
Surface Print: ClearCast™ BY REMEE FOUR-CHANNEL HYBRID FIBER CAMERA CABLE CMP C(ETL)US FT6 75°C ROHS MADE IN USA (LOT #) SEQ FT
Footage Marking: Sequentially Marked every 2 Ft.

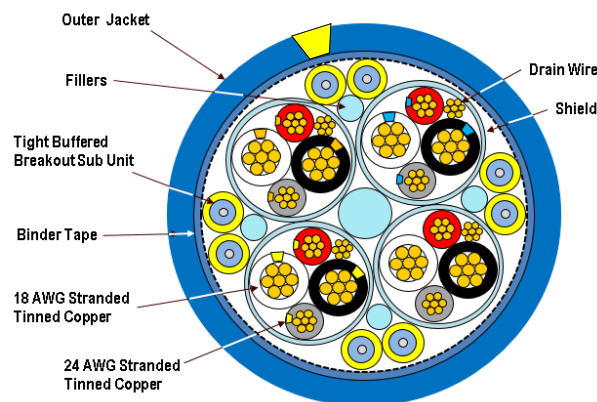

Electricals

Voltage Rating: 300V
Optical Attenuation @ 1310nm: <0.8dB/km
Component 1 (18AWG) DCR: 6.21 ohms/1M' @20°C
Component 2 (24AWG) DCR: 26.25 ohms/1M' @ 20°C

Technical Details

Temperature Rating: 75°C
Nominal Dimension 0.621 in. ± 0.020 in.
Max. Pulling Tension: 55 lbf
Weight/1M' 230 lbs

Codes & Listings

- CMP rating FT6
- C(ETL)US CMP

Product Part Number

1202SMPTE4CHPBUOW



MADE IN THE USA




Issue Date: 12/24
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

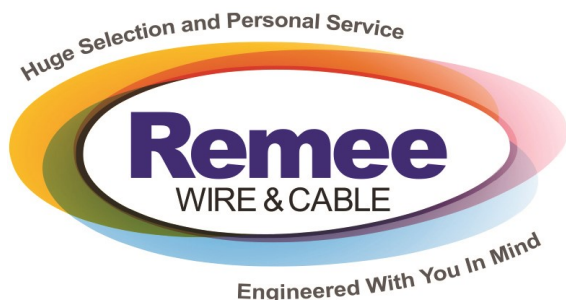

Hybrid SMPTE-311M HDTV 4-Channel (Indoor) Plenum Rated

ETL Listed for guaranteed performance
Made in the USA

Spec Part No.: 4CSMPTP

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document; Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 12/24
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921

Customer Service: 800-431-3864

Fax: 845-651-4160

Website: www.remee.com