

# 22-8P Shielded Indoor CMR Outdoor (Wet Location) Analog Audio Riser

ETL listed for guaranteed performance  
Made in the USA

**Spec Part No.: AUD8P22ISRW**


## Applications:

This document establishes the specifications of an eight pair shielded cable used for communication and audio applications suitable for wet location.

## Construction Details:

Number of Conductors: 16/C (8 Pair)  
 Conductor: 22AWG Stranded Tin Copper  
 Insulation Material: High Density Polyethylene  
 Nominal Insulation Thickness: 0.010 in.  
 Color Code: Black paired with Red  
 Individual Drain: Stranded Tin Copper  
 Individual Shield: Alum./Polyester (100% Coverage)  
 Aluminum side in with drain under tape  
 Nominal Individual Jacket Dia.: 0.135 in.  
 Individual Jacket Material: Polyvinylchloride  
 Individual Jacket Color Code:  
 Brown (Pair 1); Red (Pair 2); Orange (Pair 3);  
 Yellow (Pair 4); Green (Pair 5); Blue (Pair 6);  
 Purple (Pair 7); Gray (Pair 8)

Filler: As Required  
 Overall Shield: Aluminum/Polyester (100% Coverage)  
 Overall Drain Wire: Stranded Tin Copper  
 Tape: Water Blocking Tape  
 Overall Jacket Material: 0.050 in. Polyvinylchloride  
 Overall Jacket Color: Black (Others Available w/MOQ)  
 Nominal Diameter: 0.571 in.  
 Surface Print: ClearCast™ by REMEE 22AWG 8-PAIR  
 AUDIO CABLE CMR FT4 C(ETL)US ROHS  
 COMPLIANT ...SUITABLE FOR WET LOCATION...  
 MADE IN USA MM/YY (LOT #) SEQ FT

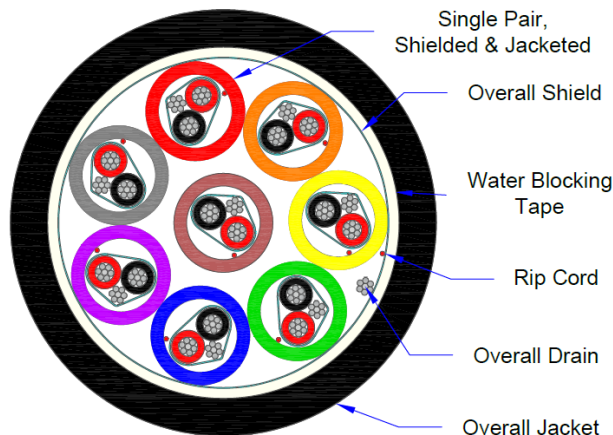

## Electricals:

Suggested Working Voltage: 300 Volts  
 Nom. Conductor DC Resistance: 14.1  $\Omega$ /1M'  
 Nom. DC Resistance Shield + Drain: 12.5  $\Omega$ /1M'  
 Nom. Cap. Cond-Cond: 25.7 pF/ft  
 Nom. Cap. Cond-Shield: 47.3 pF/ft  
 Velocity of Propagation: 66%

## Technical Details:

Temperature Rating  
 Operation: -20°C to +75°C  
 Installation: -20°C to +75°C  
 Max. Pulling Tension: 122 lbf  
 Min. Bend Radius 5.7 in.  
 Nominal Weight: 157 lbs. / 1,000 ft.

## Standards:

- UL Standard 444
- UL 1666
- C(ETL)US CMR
- RoHS Compliant




Issue Date: 07/25  
 Revision: 0

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

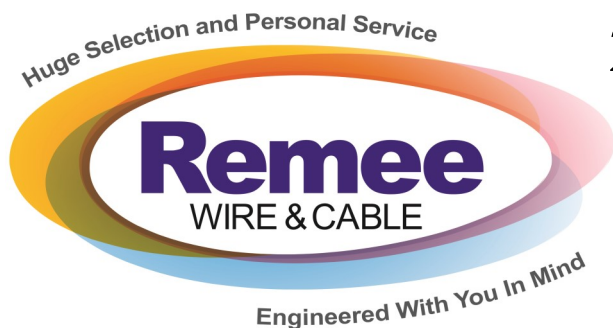

# 22-8P Shielded Indoor CMR Outdoor (Wet Location) Analog Audio Riser

ETL listed for guaranteed performance  
Made in the USA

**Spec Part No.: AUD8P22ISRW**

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

## Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length's and Put-Up's — M1 for 1,000' reel; B2 for 2,000' reel; B3 for 2,500' reel; B5 for 5,000' reel  
Available Jacket Color — B for Black, (Other Colors Available with Minimum Order Quantities)

The 3-place designator is placed at the end of the part number to describe specific packaging, length and jacket color.

**Note:** While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



Issue Date: 07/25  
Revision: 0

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)