

Category 6 Unshielded U/UTP 550 MHz Riser

ETL verified for guaranteed performance
Made in the USA

Spec Part No.: CT6R

Applications

Supports all category 6 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications with anticipated data rates to 3.2 Gbps. Suitable for IEEE 802.3af PoE power over ethernet.

Construction Details:

No. 23AWG solid bare copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs with a tape separator assembled to form a core. The core is jacketed with a flame retardant PVC.

Surface Print:

STREAMline™ by REMEE ETL VERIFIED CAT6 TO TIA-568.2-D...4PR U/UTP 23AWG C(ETL)US CMR FT4 MM/YY (LOT#)
MADE IN USA SEQ FT


Insulation Color Code:

Pair	Color Code
1	Blue with White/Blue
2	Orange with White/Orange
3	Green with White/Green
4	Brown with White/Brown

Jacket Colors: - See Table, Page 3

Electrical Parameters:

Voltage Rating:	300 Volts
Mutual Capacitance:	14 pF/ft nominal
Capacitance Unbalance:	330 pF/100 m maximum
Velocity of Propagation:	72%
Max. Conductor D.C.R.:	28.6 ohm/1,000 feet
Max. DCR Unbalance:	5%
Max. Delay Skew:	45.0 ns/100m
Characteristic Impedance:	from 0.772 - 550MHz 100 ± 15%

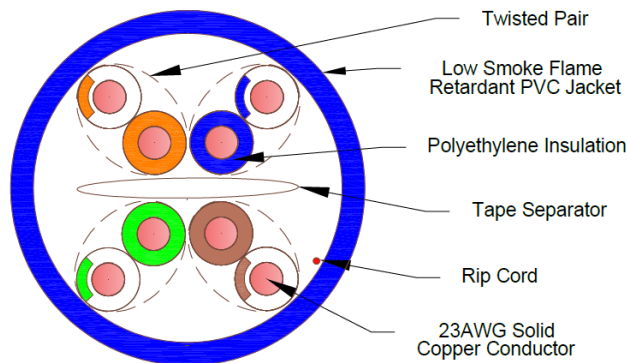

Technical Details

Temperature Rating

Installation: 0°C to 50°C

Operation: -20°C to 75°C

Nominal Diameter: 0.204in.

Maximum Installing Tension: 25 lbf

Minimum Bending Radius: 1.6 in.

Nominal Cable Weight: 23 lbs/1,000 feet

Standards

- ANSI/TIA/EIA 568.2-D Category 6
- National Electric Code – Article 800
- ISO/IEC 11801 Category 6
- UL 444 Type CMR

Codes & Listings

- CMR Rating FT4
- C(ETL)US CMR
- ETL Electrically Verified to ANSI/TIA/EIA 568.2-D Category 6

Product Part Number

6RNS




Issue Date: 05/25
Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

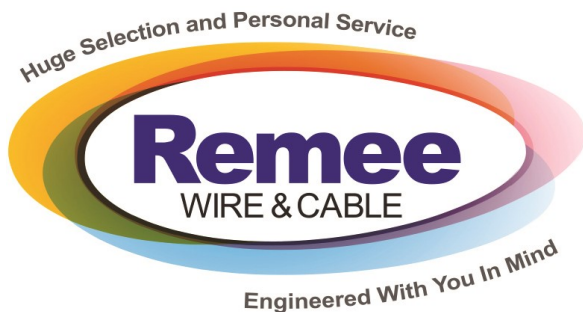

Category 6 Unshielded U/UTP 550 MHz Riser

ETL verified for guaranteed performance
Made in the USA

Spec Part No.: CT6R

Electrical Characteristics:

Frequency MHz	Return Loss dB Minimum	Attenuation dB(100m) Maximum	NEXT dB Minimum	PS-NEXT dB Minimum	ELFEXT dB Minimum	PS-ELFEXT dB Minimum	ACR dB Minimum	PS-ACR dB Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5
300	16.8	36.4	43.1	41.1	24.3	21.3	---	---
350	16.3	39.8	42.1	40.1	22.9	19.9	---	---
400	15.9	43.0	41.3	39.3	21.8	18.8	---	---
500	14.8	49.5	40.2	38.2	20.0	17.0	---	---
550	14.4	53.1	39.5	37.5	18.9	15.9	---	---

*Values above 250 MHz are for engineering information only




Issue Date: 05/25
Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

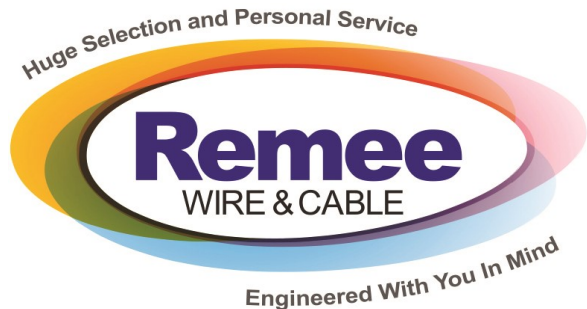

Category 6 Unshielded U/UTP 550 MHz Riser

ETL verified for guaranteed performance
Made in the USA

Spec Part No.: CT6R

Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length's and Put-Up's — **M1 for 1,000' reel; B2 for 2,000' reel; B3 for 2,500' reel; B5 for 5,000' reel**

Available Stock Jacket Color — **O for Blue, B for Black, W for White, Z for Orange**
(Other Colors Available with Minimum Order Quantities)

The 3-place designator is placed at the end of the part number to describe specific packaging, length and jacket color.

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 05/25
Revision: 8

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com