

# 12-2 Unshielded Speaker Cable Non-Plenum

ETL listed for guaranteed performance  
Made in the USA

**Spec Part No.: SPK2C12R**

## Applications:


This document establishes the specifications for a riser rated two conductor cable used in speaker cable applications.

## Construction Details:

Number of Conductors: 2/C  
 Conductor: 12AWG 19/25 OFC Bare Copper  
 Insulation Material: Polyvinyl Chloride  
 Insulation Thickness: 0.015 in.  
 Nominal Insulation Diameter: 0.120 in.  
 Color Code: Black, Red  
 Cable Lay: 5.0" Left Hand Lay  
 Jacket Material: Polyvinyl Chloride  
 Jacket Color: White or Black (Others Available with Minimum Order Quantity)  
 Jacket Thickness: 0.020 in.  
 Nominal Diameter: 0.280 in.  
 Surface Print: ClearCast™ by REMEE 12AWG 2C  
 75C C(ETL)US CL3R FT4 RoHS  
 MM/YY (LOT #) MADE IN USA SEQ  
 FT

## Electricals:

Suggested Working Voltage: 300 Volts, rms.  
 Conductor DCR, Nom.: 1.05 Ohms/1000 ft  
 Capacitance, Cond to Cond, Nom.: 43.6 pF/ft  
 Impedance, Nom.: 52 Ohms  
 Max. Current per Cond @ 30°C: 25 Amps  
 Velocity of Propagation: 45%

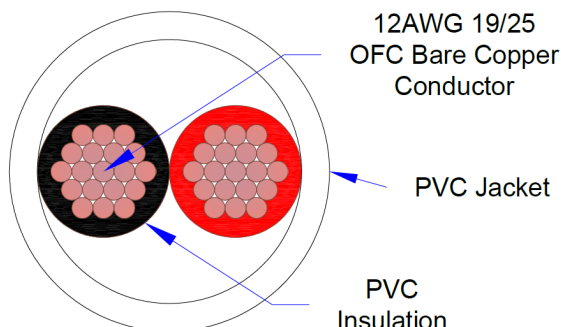

## Technical Details:

### Temperature Rating

Installation: 0°C to + 50°C

Operation: -20°C to + 75°C

Nominal Weight: 56 lbs. / 1,000 ft.

Max Installing Tension: 97 lbf

Min Bending Radius: 2.8 in

## Standards:

- National Electric Code - Article 725
- CL3R Rating FT4

## Codes & Listings:

- (ETL)US CL3R
- C(ETL) FT4

## Product Part Number

CH1026F




Issue Date: 06/25  
Revision: 1

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

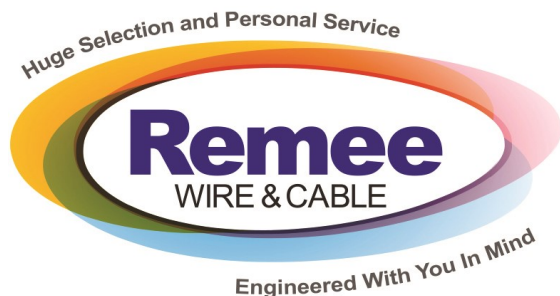

# 12-2 Unshielded Speaker Cable Non-Plenum

ETL listed for guaranteed performance  
Made in the USA

**Spec Part No.: SPK2C12R**

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

## Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length's and Put-Up's — **M1 for 1,000' reel; B2 for 2,000' reel; B3 for 2,500' reel; B5 for 5,000' reel**

Available Stock Jacket Color — **O for Blue, B for Black, W for White, Z for Orange**  
(Other Colors Available with Minimum Order Quantities)

**The 3-place designator is placed at the end of the part number to describe specific packaging, length and jacket color.**

**Note:** While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



**MADE IN THE USA**



Issue Date: 06/25  
Revision: 1

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)