

12-2 Unshielded Speaker Cable CMR/Wet Location

ETL listed for guaranteed performance
Made in the USA

Spec Part No.: SPK2C12RW

Applications:


This document establishes the specifications for a riser rated two conductor cable used in speaker cable applications. Suitable for wet locations.

Construction Details:

Number of Conductors: 2/C
 Conductor: 12AWG 65/30 OFC Bare Copper
 Insulation Material: Polyvinyl Chloride
 Insulation Thickness: 0.020 in.
 Nominal Insulation Diameter: 0.133 in.
 Color Code: Black, Red
 Cable Lay: 5.0" Left Hand Lay
 Tape: Water Blocking Tape
 Rip Cord: Nylon
 Jacket Material: Polyvinyl Chloride
 Jacket Color: White or Black (Others Available with Minimum Order Quantity)
 Jacket Thickness: 0.020 in.
 Nominal Diameter: 0.327 in.
 Surface Print: ClearCast™ by REMEE 12AWG 2C
 75C (ETL)US CL3R FT4 RoHS
 MM/YY (LOT #) MADE IN USA SEQ
 FT

Electricals:

Suggested Working Voltage: 300 Volts, rms.
 Conductor DCR, Nom.: 1.05 Ohms/1000 ft
 Capacitance, Cond to Cond, Nom.: 26.2 pF/ft
 Impedance, Nom.: 67 Ohms
 Max. Current per Cond @ 30°C: 26 Amps
 Velocity of Propagation: 58%

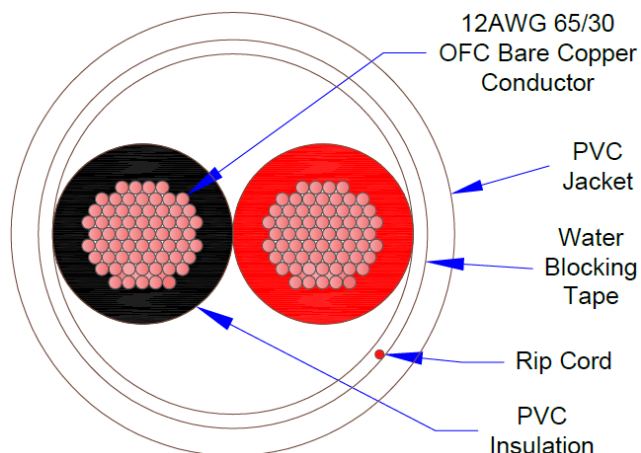

Technical Details:

Temperature Rating

Installation: 0°C to + 50°C

Operation: -20°C to + 75°C

Nominal Weight: 67 lbs. / 1,000 ft.

Max Installing Tension: 104 lbf

Min Bending Radius: 3.3 in

Standards:

- National Electric Code - Article 725
- CL3R Rating FT4

Codes & Listings:

- (ETL)US CL3R
- C(ETL) FT4



MADE IN THE USA




Issue Date: 09/25
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

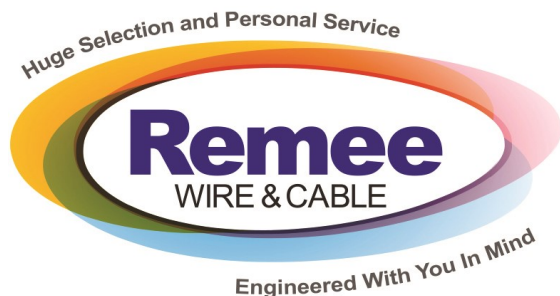

12-2 Unshielded Speaker Cable CMR/Wet Location

ETL listed for guaranteed performance
Made in the USA

Spec Part No.: SPK2C12RW

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length's and Put-Up's — **M1 for 1,000' reel; B2 for 2,000' reel; B3 for 2,500' reel; B5 for 5,000' reel**

Available Stock Jacket Color — **O for Blue, B for Black, W for White, Z for Orange**
(Other Colors Available with Minimum Order Quantities)

The 3-place designator is placed at the end of the part number to describe specific packaging, length and jacket color.

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____



MADE IN THE USA



Issue Date: 09/25
Revision: 2

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com