

Part No.: CH1024F

## 14-4 Unshielded Audio Cable Non-Plenum

ETL listed for guaranteed performance  
Made in the USA

### Applications


This document establishes the specifications for a four conductor cable used in audio and power limited circuit applications.

### Construction Details

Number of Conductors: 4/C  
Conductor: 14 AWG 105/34 bare copper  
Insulation Material: Polyvinyl Chloride  
Insulation Thickness: 0.012 in.  
Insulation Diameter: 0.097 in.  
Color code: Black, Red, White, Green  
Jacket material: Polyvinyl Chloride  
Jacket thickness: 0.018 in.  
Nominal Diameter: 0.270 in.  
Surface Print: 3122598 HI-STRAND AUDIO  
CABLE 4 COND 14AWG 105  
STRAND CL3 75°C (ETL)US  
MADE IN USA...SUITABLE FOR  
OUTDOOR USE...OXYGEN FREE  
COPPER + Sequential Footage  
Marking

### Electricals

Suggested Working Voltage: 150 Volts, rms.

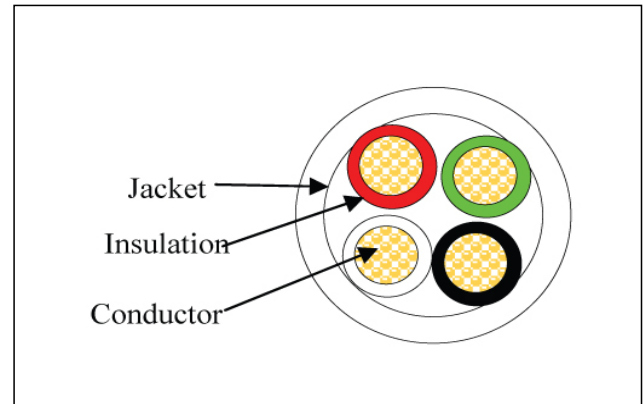

### Standards

NEC Article 725  
UL Subject 13, Type CL3

### Codes & Listings

(ETL)US Type CL3

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.