

Part No.: 725223

## 22-4 Shielded Plenum

### Applications


This document establishes the specifications for plenum rated four conductor shielded cable used for communication applications.

### Construction Details

Number of Conductors: 4/C  
Conductor: 22AWG Stranded Bare Copper  
Insulation Material: Remguard Plenum Polymer  
Nominal Insulation Thickness: 0.007 in.  
Nominal Insulation Diameter: 0.043 in.  
Color Code: Black, Natural, Red, Green  
Shielding: Overall Aluminum/Polyester (100% coverage)  
Drain: Stranded Tin Copper  
Jacket Material: Remguard Plenum Polymer  
Nominal Jacket Thickness: 0.015 in.  
Nominal Diameter: 0.137 in.  
Surface print: 3122598 CMP 22AWG C(ETL)US  
FT6 + Sequential Footage Marking

### Electricals

Suggested Working Voltage: 300 Volts, rms.

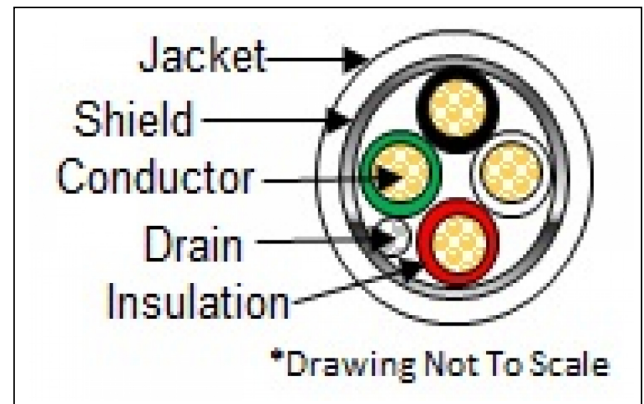

### Technical Details

Temperature Rating  
Operation: -2°C to +60°C  
Nominal Weight: 17 lbs. /1,000 feet

### Standards

NEC Article 800  
UL Subject 444, Type CMP FT6

### Codes & Listings

C(ETL)US CMP FT6

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.