

Part No.: 900916R

18-6 Shielded Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Applications


This document establishes the specifications of a six conductor shielded cable used for communication applications.

Construction Details

Number of Conductors: 6/C
Conductor: 18AWG Stranded Bare Copper
Insulation Material: Polyvinyl Chloride
Nominal Insulation Thickness: 0.008 in.
Nominal Insulation Diameter: 0.062 in.
Color Code: Black, Red, White, Green, Brown, Blue
Shielding: Overall Aluminum/Polyester (100% coverage)
Drain: Stranded Tin Copper
Jacket Material: Polyvinyl Chloride
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.220 in.
Surface Print: 3122598 CMR 18AWG C(ETL)US FT4 + Sequential Footage Marking

Electricals

Suggested Working Voltage: 300 Volts, rms.

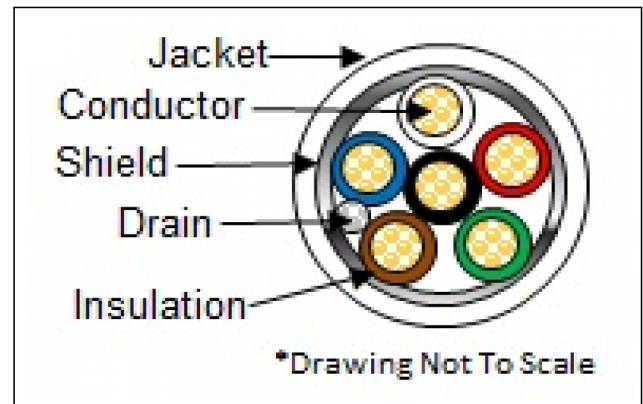

Technical Details

Temperature Rating
Operation: -20°C to +60°C
Nominal Weight: 47 lbs. / 1,000 feet

Standards

UL Article 800
UL Subject 444
CMR Type FT4

Codes & Listings

C(ETL)US CMR FT4

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remee.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.