

Part No.: 5AE244UTPR

## Category 5E 350 MHz Non-Plenum

ETL listed for guaranteed performance

### Applications

Supports all category 5 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, and Ethernet 1000BASE-T

### Construction Details


No.24 AWG copper conductor insulated with polyethylene. Two colored mated insulated conductors twisted together to form a pair and four pairs assembled to form a core. The core is jacketed with a flame retardant PVC.

### Electricals

Mutual Capacitance: 14 pF/ft Nominal  
Capacitance Unbalance: 330 pF/ft Maximum  
Velocity of Propagation: 70%  
Max. Conductor D.C.R.: 28.6 ohm/1000 feet  
Max. DCR Unbalance: 5%  
Max. Delay Skew: 45.0 ns/100m  
Characteristic Impedance: from 0.772 ohm 100 MHz 100ohm ohm 15%  
from 101ohm 200 MHz 100ohm ohm 22%  
from 201ohm 350 MHz 100ohm ohm 32%  
Max. Propagation Delay Skew: 5.7 ns/100m

### Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

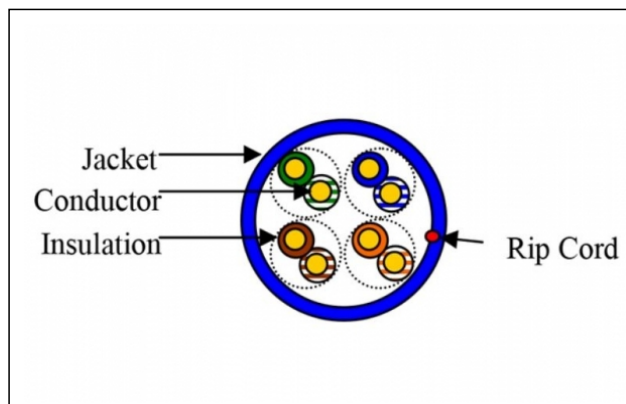

### Technical Details

Temperature Rating  
Installation: -0°C to 50°C  
Operation: -10°C to 60°C  
Nominal Overall Diameter: 0.185 in.  
Nominal Cable Weight: 20 lb/1000 feet  
Maximum Installing Tension: 25 lb  
Minimum Bending Radius: 1.0 in.

### Standards

ANSI/TIA/EIA 568C.2 Category 5e  
ISO/IEC 11801 Category 5e  
National Electric Code ? Article 800

### Codes & Listings

UL 1666: CMR rating FT4  
ETL Electrically Verified to ANSI/TIA/EIA 568C.2  
Category 5e  
C(ETL)US CMR

### Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

### Warranty Info

All warranty information can be viewed at [www.remee.com](http://www.remee.com). This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

**Electrical Characteristics:**

Frequency	SRL	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
	dB	dB	dB(100m)	dB	dB	dB	dB	dB	dB
MHz	Minimum	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	23.0	20.0	2.0	65.3	62.3	63.8	60.8	63.3	60.3
4	23.0	20.3	4.0	56.3	53.3	51.7	48.7	52.3	49.3
8	23.0	20.5	5.7	51.8	48.8	45.7	42.7	46.1	43.1
10	23.0	25.0	6.4	50.3	47.3	43.8	40.8	43.9	40.4
16	23.0	25.0	8.2	47.3	44.3	39.7	36.7	39.1	36.1
20	23.0	25.0	9.2	45.8	42.8	37.7	34.7	36.6	33.6
25	22.0	25.0	10.4	44.3	41.3	35.8	32.8	33.9	30.9
31.25	21.1	23.6	11.7	42.9	39.9	33.9	30.9	31.2	28.2
62.5	18.1	21.5	16.9	38.4	35.4	27.8	24.8	21.5	18.5
100	16.0	20.1	21.9	35.3	32.3	23.8	20.8	13.4	10.4
250	12.0	17.3	36.8	34.3	32.3	15.8	12.8	----	----
300	11.2	16.8	40.9	33.2	31.2	14.2	11.2	----	----
350	10.6	16.3	44.8	32.2	30.2	12.9	9.9	----	----