

Part No.: 6DBFLD234UTPMESS

Category 6 Flooded W/ Messenger Polyethylene Jacket

Made in the USA

Applications


Supports all category 6 applications including Ethernet 100BASE-TX, 100BASE-VG and 155 ATM. Particularly suited for high bandwidth applications such as 622 ATM, Wideband, Ethernet 1000BASE-T and emerging applications with anticipated data rates to 3.2 Gbps.

Electricals

Mutual Capacitance: 14 pF/ft nominal
 Capacitance Unbalance: 330 pF/ft maximum
 Velocity of Propagation: 70%
 Max. Conductor D.C.R.: 28.6 ohm/1000 feet
 Max. DCR Unbalance: 5%
 Max. Delay Skew: 45.0 ns/100m
 Characteristic Impedance:
 from 0.772 - 100 MHz 100 ± 15%
 from 101 - 250 MHz 100 ± 22%

Color Code:

Pair	Color Code
1	Blue with White
2	Orange with White
3	Green with White
4	Brown with White

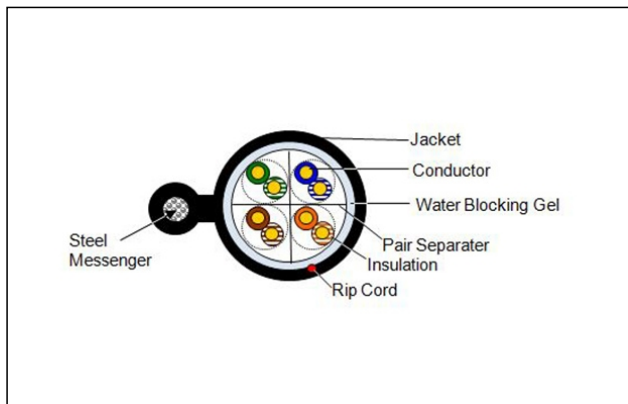

Technical Details

Temperature Rating
 Installation 0°C to 50°C
 Operation -10°C to 60°C
 Nominal Diameters: Over Cat6: 0.275 in.
 Over Mess: 0.095 in.
 Major: 0.390 in.

Standards

ANSI/TIA/EIA 568C.2 Category 6

Codes & Listings


Non-listed

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Warranty Info

All warranty information can be viewed at www.remeewire.com. This product is RoHS compliant and is directive 2002/95/EC. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

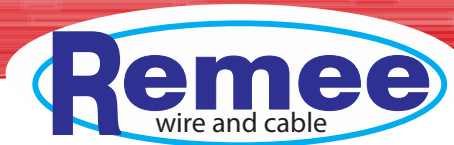

Electrical Characteristics:

Frequency	Return Loss	Attenuation	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR
MHz	dB	dB(100m)	dB	dB	dB	dB	dB	dB
	Minimum	Maximum	Minimum	Minimum	Minimum	Minimum	Minimum	Minimum
1	20.0	2.0	80.3	78.3	73.8	70.8	78.3	76.3
4	23.0	3.8	71.3	69.3	61.8	58.8	67.5	65.5
10	25.0	6.0	65.3	63.3	53.8	50.8	59.3	57.3
16	25.0	7.6	62.2	60.2	49.7	46.7	54.6	52.6
20	25.0	8.5	60.8	58.8	47.8	44.8	52.3	50.3
31.25	23.6	10.7	57.9	55.9	43.9	40.9	47.2	45.2
62.5	21.5	15.4	53.4	51.4	37.9	34.9	38.0	36.0
100	20.1	19.8	50.3	48.3	33.8	30.8	30.5	28.5
200	18.0	29.0	45.8	43.8	27.8	24.8	16.8	14.9
250	17.3	32.8	44.3	42.3	25.8	22.8	11.5	9.5