


Part No.: 11-XXX-76E-AYNONF

11 Series Distribution Tight Buffer SM Enhanced (2-12 Fiber) OFNR

Scope

This document establishes the specification requirements for a singlemode OS2 distribution fiberoptic cable. This cable construction consists of singlemode fibers in a distribution tight-buffered design with a riser rated PVC jacket suitable for indoors.

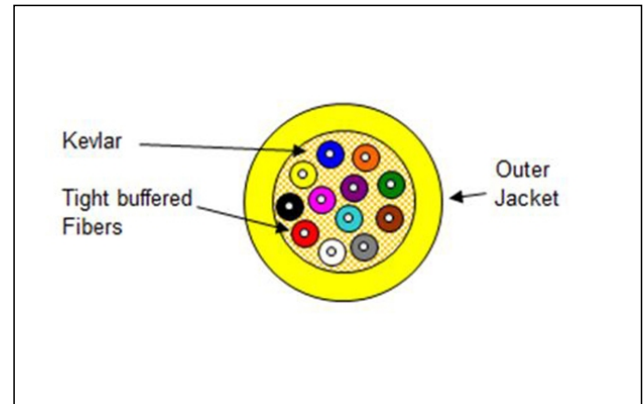

Applications

Riser Indoor

Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 1666
- GR-409-CORE

Overall Cable Construction

- Tight Buffered Fiber
- Dimension: 900 μ m, nominal.
Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.
- Cable strength
Aramid yarns are pulled in with the tight-buffered fibers under the outer jacket.
- Outer Sheath
Yellow riser rated PVC jacket (or color per customer request)
- Cable Markings
REMFO 11 SERIES, FIBER OPTIC CABLE, XX (No. of fibers)-SM, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNR C(ETL)US, Sequentially meter marked.
- Special print as required by customer

Fiber Attenuation

$\leq 0.40/0.30$ dB/km

Mechanical & Environmental Performance



Maximum Tensile Load for:

Installation:

- 2&4-fiber 1405N/315lbf,
- 6&8-fiber 1610N/362lbf
- 12-fiber 2700N/600lbf

Long Term:

- 2&4-fiber 455N/102lbf,
- 6&8-fiber 535N/120lbf
- 12-fiber 600N/135lbf

Minimum bending radius:

- Loaded: 20 x diameter
- Unloaded: 10 x diameter

Impact Resistance: 25 Impacts (min.)

Flexing, $\pm 90^\circ$: 25 Cycles (min.)

Temperature rating:

Operation, -40°C to $85\pm\text{C}$

Installation, 0°C to $75\pm\text{C}$

Storage, $-55\pm\text{C}$ to $85\pm\text{C}$

Crush Resistance: 100N/cm

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.

Warranty Info

All warranty information can be viewed at www.remee.com.
This product is RoHS compliant and is directive 2002/95/EC.
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.