


Part No.: 33-XXX-12C-RZSXNP

33 Series Distribution Tight Buffer 50Micron MM 1Gig (12+ Fiber) OFNP

Scope

This document establishes the specification requirements for a distribution multimode, fiberoptic cable. This cable construction consists of multimode fibers in a distribution tight-buffered design with a plenum rated jacket.

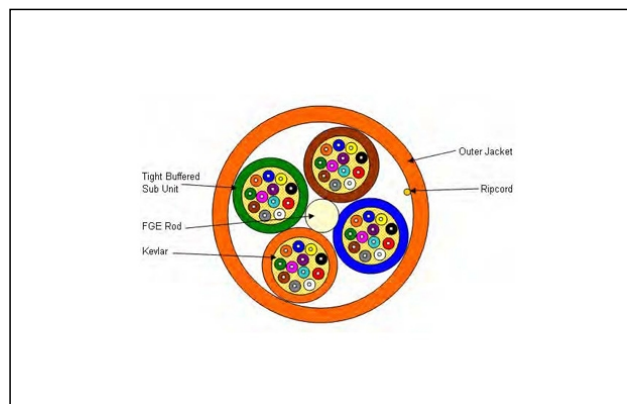

Applications

Plenum Indoor

Applicable Documents

- TIA/EIA FOTP Standards 455
- Color Coding of Fiber Optic Cables TIA/EIA-598
- UL 910
- GR-409-CORE

Overall Cable Construction

- Tight Buffered Fiber
- Dimension: 900 μ m, nominal.
Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.
- Sub-unit consists of aramid yarns that are pulled in with the tight-buffered fibers under a sub-unit jacket that is uniquely identified.
- Cable strength Member
Fiberglass Epoxy Rod (dielectric)
- An up coat of plenum material (if necessary per construction for symmetry).
- Cable Core
Sub-units and fillers (if needed) are stranded around the CSM, using reverse oscillation.
- A non-wicking and non-hygroscopic tape is applied longitudinally with a nominal 25% overlap.
- Binder yarns are applied over the core tape.
- Outer Sheath
Orange plenum rated Remguard? jacket (or color per customer request)
- Cable Markings
REMFO 33 SERIES, FIBER OPTIC CABLE, XX (denotes number of fibers)-50/125, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNP C(ETL)US, Sequentially marked.
- Special print as required by customer.



Fiber Attenuation

$\leq 3.0 / 1.0$ dB/km

Fiber Bandwidth

$\geq 500 / 500$ MHz-km

Mechanical & Environmental Performance

Maximum Tensile Load for:
- Installation: 2700N / 607lbf
- Long Term: 890N / 200lbf
Minimum bending radius:
- Loaded: 20 x diameter
- Unloaded: 10 x diameter
Crush Resistance: 220N/cm

Impact Resistance: 25 Impacts (min.)
Flexing, $\pm 90^\circ$: 25 Cycles (min.)
Temperature Rating:
Operation, -20°C to $+85\pm\text{C}$
Installation, 0°C to $+75\pm\text{C}$
Storage, -40°C to $+85\pm\text{C}$

Preparation for Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.

Warranty Info

All warranty information can be viewed at www.remee.com.
This product is RoHS compliant and is directive 2002/95/EC.
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.