




# 18-2 Shielded Non-Plenum

Part No.: 900912WBTPOLY

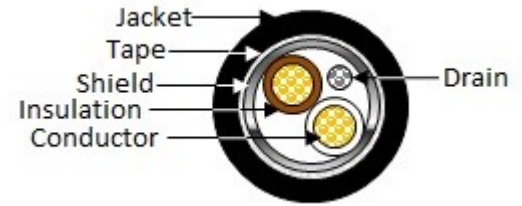

## Applications:

This document establishes the specifications of a two conductor shielded cable with a water block tape and polyethylene jacket suitable for outdoor and direct burial use.

## Construction Details:

Number of Conductors: 2  
 Conductor: 18AWG Stranded Bare Copper  
 Insulation Material: Polyvinyl Chloride  
 Nominal Insulation Thickness: 0.008 in.  
 Nominal Insulation Diameter: 0.062 in.  
 Color Code: Black, White  
 Shielding: Aluminum/Polyester Tape  
 (100% Coverage, Foil and Drain In)  
 Drain: Stranded Tin Copper  
 Tape: Water Block Tape  
 Jacket Material: Polyethylene  
 Jacket Color: Black  
 Nominal Jacket thickness: 0.025 in.  
 Nominal Diameter: 0.206 in.  
 Surface Print: REMEE PRODUCTS 18AWG 2  
 COND + Sequential Footage Marking

## Electricals:

Suggested Working Voltage: 300 Volts, rms.

## Technical Details:

Temperature Rating

Operation: -20°C to +60°C

Nominal Weight:

22 lbs. / 1,000 feet

## Codes & Listings:

- Non Listed

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.


Issue Date: 11/15  
 Revision: 3

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)



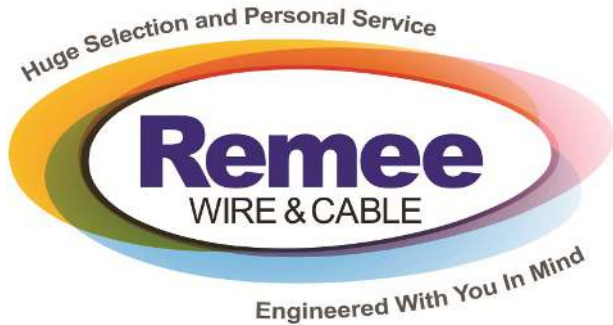

# 18-2 Shielded Non-Plenum

Part No.: 900912WBTPOLY

**Note:** While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_

Issue Date: 11/15  
Revision: 3

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

