

# 24-2 Braid Shield Microphone Cable Non-Plenum

Part No.: 2C24MC224

## Applications:


This document establishes the specifications for a two conductor braided cable used for communication and low loss microphone cable.

## Construction Details:

Number of Conductors: 2/C  
 Conductor: 24AWG 41/40 Stranded Bare Copper  
 Insulation Material: Polyethylene  
 Nominal Insulation Thickness: 0.013 in.  
 Color Code: Black, White  
 Fillers: Fibrillated Polypropylene  
 Braid Shield: 36AWG Bare Copper 95% Coverage  
 Jacket Material: Polyvinyl Chloride  
 Nominal Jacket Diameter: 0.236 in.  
 Jacket Color: Matte Black  
 Surface Print: REMEE PRODUCTS 2/C  
 24AWG LOW LOSS MICROPHONE  
 CABLE MADE IN USA

## Electricals:

Suggested Working Voltage: 300 Volts, rms.  
 Nominal Capacitance Cond-Cond: 20 pF/FT

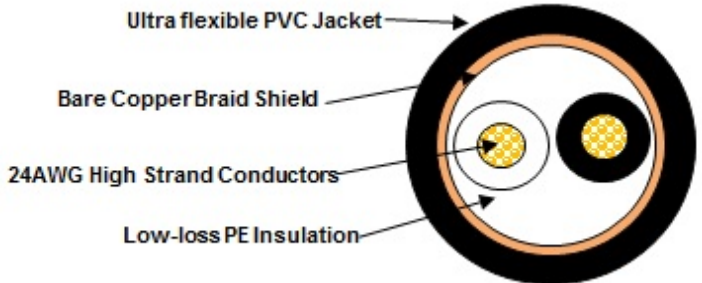

## Technical Details:

Temperature Rating

Operation	-40°C to +80°C
Installation	-20°C to +80°C

Nominal Weight: 38 lbs. / 1,000 ft.

## Codes & Listings:

- NonListed

## Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA

Issue Date: 03/19  
 Revision: 0

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)



# 24-2 Braid Shield Microphone Cable Non-Plenum

Part No.: 2C24MC224

**Note:** While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_

Company: \_\_\_\_\_

Date: \_\_\_\_\_



**MADE IN THE USA**

Issue Date: 03/19  
Revision: 0

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)