

# Access Control Cable Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 5333-HN

## Applications:

This document establishes the specifications for a plenum rated two conductor unshielded cable used for communication applications.

## Type HN - Horn:

Number of Conductors: 2/C  
Conductor: 20AWG Stranded Bare Copper.  
Insulation Material: 0.008in. Low Smoke Polyvinylchloride  
Insulation Color Code: Red, Black  
Jacket Material: Low Smoke Polyvinylchloride  
Jacket Color: Orange  
Rip Cord: Nylon  
Nominal Diameter: 0.154 in.  
Surface Print: VIGILANCE™ by REMEE 5333-HN (Logo) HORN CMP  
2/20AWG c(ETL)us A B C D E 0 1 2 3 4 5 6 7 8 9



## Electricals:

Suggested Working Voltage: 300 Volts, rms.  
DC Resistance: 10.5 Ohms / 1000 ft @ 20C

## Technical Details:

Temperature Rating: -20°C to 60°C  
Nominal Weight: 12 lbs. / 1,000 feet

## Codes & Listings:

- UL Subject 444, Type CMP
- C(ETL)US




Issue Date: 12/20  
Revision: 0

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

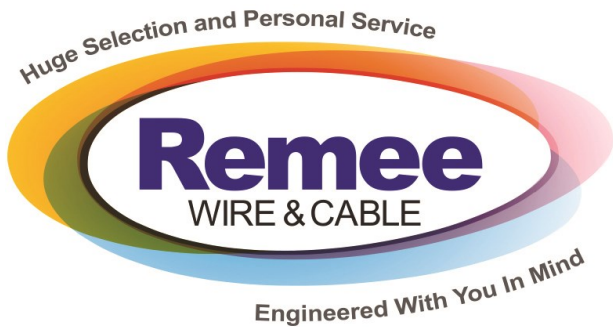

# Access Control Cable Plenum

ETL listed for guaranteed performance  
Made in the USA

Part No.: 5333-HN

### Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

**Note:** While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: \_\_\_\_\_  
Company: \_\_\_\_\_  
Date: \_\_\_\_\_



Issue Date: 12/20  
Revision: 0

**All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).**

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)