

12-2 Shielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725121

Applications:


This document establishes the specifications for a plenum two conductor shielded cable used for remote control and signaling power limited circuit applications

Construction Details:

Number of Conductors: 2/C
Conductor: 12AWG Stranded Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.009 in.
Nominal Insulation Diameter: 0.107 in.
Color Code: Black, Red
Shield: Aluminum/Polyester Tape (100% Coverage)
Drain: Stranded Tin Copper
Jacket Material: Remguard Plenum Polymer
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.247 in.
Surface Print: 3122598 CL3P/FPLP 12AWG
(ETL)US FT6 + Sequential Footage
Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

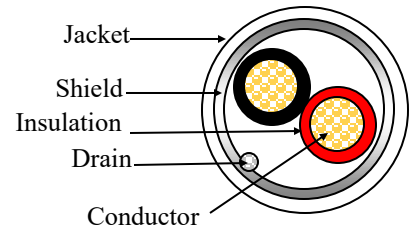

Technical Details:

Temperature Rating

Operation: -2°C to +60°C

Nominal Weight: 54 lbs. / 1,000 ft.

Standards:

- NEC Article 725
- CL3P Rating FT6

Codes & Listings:

- (ETL)US CL3P

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.




Issue Date: 01/16
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

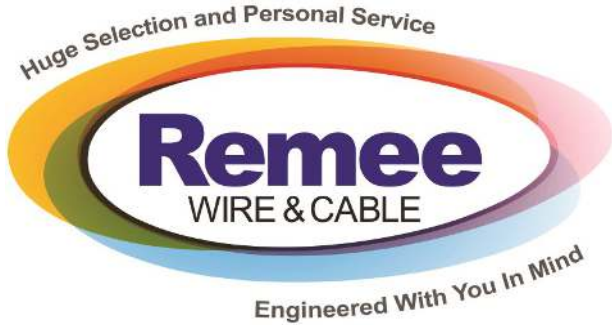

12-2 Shielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725121

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
Company: _____
Date: _____



Issue Date: 01/16
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

1751 State RTE. 17A STE #1 Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com