

Part No.: R001536

Description:

This document establishes the specifications siamese type cable containing one RG6/U and two conductors unshielded with a UV resistant jacket used in communication applications.

Construction Details (18/2):

Conductor: 18AWG Stranded Bare Copper Insulation Material: Polyolefin. Color Code: Black, Red

Construction Details (RG6/U):

Conductor: 18AWG Solid Bare Copper Dielectric Material: Cellular Polyethylene. Nominal Dielectric Core O.D.: 0.180 in. Braid Shield: CCA 95% Coverage

Construction Details (Overall):


Construction Type: Siamese Jacket Material: Polyvinyl Chloride Nominal Cable Dimensions: Minor: 0.270 in. (RG6/U) Minor: 0.198 in. (18/2) Major: 0.493 in. Jacket Color: Black UV Resistant

Electricals (RG6/U):

Nominal Characteristic Impedance: 75 Ω Nominal Capacitance: 17.3 pF/ft Nominal Velocity of Propagation: 78% Nominal Attenuation per 100 ft:

- 2.20 dB @ 100 MHz
- 4.00 dB @ 200 MHz
- 8.30 dB @ 900 MHz

Composite Video with Power Pair

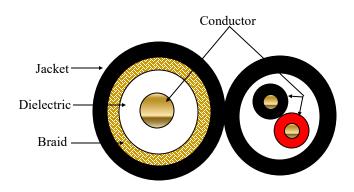

Standards

- NEC Articles 800
- UL Subject 444

Codes & Listings

- CMR Rating
- C(ETL)US CMR

Technical Details:

Temperature Rating

Operation: -10°C to +60°C

Nominal Weight: 66 lbs. / 1,000 ft

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.





Issue Date: 10/15 Revision: 0 All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .



Composite Video with Power Pair

Part No.: R001536

Note: While Remee Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remee Products Corp. does not guarantee that it is error-free, nor does Remee Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remee Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remee Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature:

Company:

Date: _____





Issue Date: 10/15 Revision: 0 All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC.

1751 State RTE. 17A STE #1 Florida, NY 10921Customer Service: 800-431-3864Fax: 845-651-4160Website: www.remee.com