

Access Control Cable OSP/Wet Location

Part No.: 5333-EL_HN/OSP

Applications:


This document establishes the specifications for an outdoor and wet location use two-conductor unshielded cable used for communication applications. This UV-stable cable can be used for in-conduit applications.

Type EL—Lock:

Number of Conductors: 2/C
 Conductor: 16AWG Stranded Tinned Copper.
 Insulation Material: 0.017 in. Polyvinylchloride
 Insulation Color Code: Black, Red
 Tape: Water blocking Tape
 Jacket Material: .037 in. Polyvinylchloride
 Jacket Color: Black
 Rip Cord: Nylon
 Nominal Diameter: 0.289 in.
 Surface Print: VIGILANCE™ by REMEE 5333-EL_HN/OSP (Amazon Logo) LOCK
 2/16AWG A B C D E 0 1 2 3 4 5 6 7 8 9

Electricals:

Suggested Working Voltage: 300 Volts, rms.
 DC Resistance: 4.4 Ohms/1000ft @ 20C, Nominal
 Capacitance, Conductor to Conductor: 33pF/Ft., Nominal

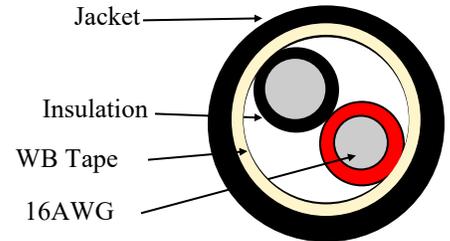

Remeë: R00160TOSPAMZ

Technical Details:

Temperature Rating:	-30°C to 105°C
Nominal Weight:	38 lbs. / 1,000 feet
Bend Radius	2.9 in.
Pull Tension, Max.	71 lbs.




MADE IN THE USA

Issue Date: 04/22
 Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

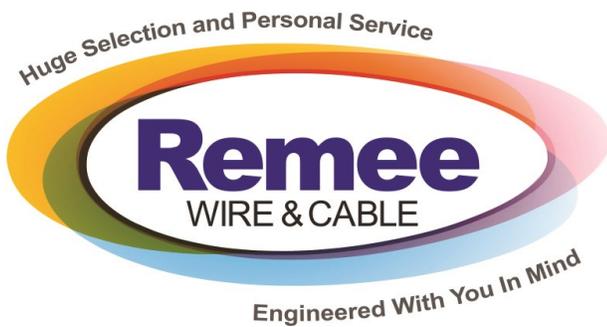

Access Control Cable OSP/Wet Location

Part No.: 5333-EL_HN/OSP

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Specific Part Number Information for Length, Put-Up & Jacket Color:

Available Length Designations — M for 1000 feet, B3B for 2500 feet, B5B for 5000 feet

Available Put-Up's — 1 for Reel

Available Jacket Color — B for Black

These 3-place designators are placed at the end of the specific part number to fully describe the individual packaging and length.

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____
Company: _____
Date: _____



Issue Date: 04/22
Revision: 3

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .